

GLOBE VALVE SERIES 截止阀系列

产品材质Product material:
WCB, A105, LCB, LF2, WC6, F11, WC9, F22, QT450, ZG1Cr5Mo, F5, ZG20CrMoV, ZG15Cr1Mo1V, 12Cr1MoV, C12A, F91, F92, CF8, F304, CF8M, F316, CF3, F304L, CF3M, F316L, CF8C, F347, F304H, F316H, F321H, 4A, F51, 5A, F53, Inconel, Monel, 铜合金(Copper alloy), 钛合金(Titanium alloy), 哈氏合金(Hastelloy alloy), 镍合金(Nickel alloy)等

制造标准Manufacturer's standard: GB, DIN, API, ANSI, JIS, BS等
公称直径Nominal Diameter: 10mm~4000mm及1/2"~160"
工作压力Working pressure: 0.25MPa~76.0MPa/150Lb~4500Lb/10K~320K
工作温度Operation temperature: -196°C~816°C

适用工况: 石油、化工、天然气、电站、核电、军工、市政、冶金、建筑、制药、造纸、煤矿、水泥、排污、环保、新能源等行业

Applicable working conditions: petroleum, chemical, natural gas, power plants, nuclear power, military, municipal, metallurgical, construction, pharmaceutical, papermaking, coal mining, cement, pollution discharge, environmental protection, new energy and other industries



国标法兰截止阀
GB Flange Globe Valve



Y型截止阀
Y type Globe Valve



角式截止阀
Angle Globe Valve



氧气截止阀
Oxygen Globe Valve



抗生素截止阀
Antibiotic Globe Valve



保温截止阀
Insulation Globe Valve



低温截止阀
Cryogenic Globe Valve



气动截止阀
Pneumatic Globe Valve



伞齿轮截止阀
Bevel Gear Globe Valve

国标截止阀 GB GLOBE VALVE

结构优势与特点Structural advantages and characteristics

- 1、产品设计制造按国家标准GB 12235,结构合理,密封可靠,性能优良,造型美观。
- 2、阀瓣、阀座密封面用铁基合金堆焊或司太立(stellite)钴基硬质合金堆焊而成,耐磨、耐高温、耐腐蚀、抗擦伤性能好、使用寿命长。
- 3、阀杆经调质及表面氮化处理,有良好的抗腐蚀性和抗擦伤性。
- 4、可采用各种配管法兰标准及法兰密封面型式,满足各种工程需要和用户要求。
- 5、阀体材料品种齐全,填料、垫片可根据实际工况或用户要求合理选配,能适用与各种压力、温度及介质工况。
- 6、倒密封采用螺纹连接密封座或本体堆焊不锈钢而成,密封可靠,填料更换可在不停机情况下进行方便快捷不影响系统运行。
- 1、 The product designed and manufactured according to national standard GB 12235, reasonable structure, reliable sealing, excellent performance and beautiful shape.
- 2、 Flap valve, the valve seat sealing surface of iron based alloy or stellite (stellite) made of cobalt-based alloy welding, wear-resistant, high temperature, corrosion, anti-abrasion performance, long life.
- 3、 Stem quenched and the nitrogen treatment, with good resistance to corrosion and scratch resistance.
- 4、 Can be used with a variety of standard pipe flanges and flange sealing surface types to meet various project needs and user requirements.
- 5、 Body material variety, packing, gasket can be based on actual working conditions or the user requests a reasonable option, can be applied with all kinds of pressure, temperature and medium conditions.
- 6、 Sealed with screw connection seal back seat or body made of stainless steel welding, sealing and reliable replacement of filling in non-stop convenient and efficient manner does not affect system operation.

标准与规范 Standards and norms



设计与制造 Design and Manufacture	结构长度 Structure Length	压力、温度等级 Pressure, temperature rating	连接法兰 Connecting flange	检验与试验 Test and Inspection
GB 12235	GB 12221	GB 12224	JB/T 79/82~1994 GB 9113 HG 20592-20635	JB/T 9092-1999 GB 13927

主要零件材料 Main components material

名称 Name	材料 Material								
阀体/阀盖 Body/Bonnet	CF8	CF3	CF8M	CF3M	WCB	LCB	WC6	WC9	C5
阀瓣 Wedge	CF8	CF3	CF8M	CF3M	WCB	LCB	WC6	WC9	C5
阀杆 Stem	F304	F304L	F316	F316L	2CR13	F304	F304	F304	F304
阀杆螺母 Stem Nut	铝青铜 Aluminium Bronze								
填料 Packing	PTFE/柔性石墨				石墨 Graphite				
垫片 Gasket	PTFE/金属缠绕垫				石墨 Graphite				
压盖 Gland	CF8	CF3	CF8M	CF3M	WCB	LCB	WC6	WC9	C5
螺栓 Bolt	35CrMoA								
螺母 Nut	不锈钢 Stainless Steel				45、35CrMoA				
手轮 Handwheel	不锈钢 Stainless Steel				铸钢 Cast Steel				

国标截止阀 GB GLOBE VALVE

J41W-1.6
C/I/P/R



主要外形尺寸及连接尺寸 Main external and connection dimension

HG/T 20592

公称压力 PN(MPa)	公称口径 DN(mm)	尺寸Size(mm)										电动装置型号 Electric device model	壁厚 Wall thickness
		L	D	D1	D2	D6	b-f	f2	Z-Φd	H	D0		
1.6	10	130	90	60	40	-	16-2	-	4-Φ14	198	120	-	6.4
	15	130	95	65	45	-	16-2	-	4-Φ14	218	120	-	6.4
	20	150	105	75	55	-	18-2	-	4-Φ14	230	140	-	6.4
	25	160	115	85	65	-	18-2	-	4-Φ14	240	160	-	6.4
	32	180	140	100	78	-	18-2	-	4-Φ18	250	180	-	6.4
	40	200	150	110	85	-	18-3	-	4-Φ18	262	200	-	6.4
	50	230	165	125	100	-	18-3	-	4-Φ18	280	240	DZW10A	7.9
	65	290	185	145	120	-	18-3	-	8-Φ18	327	280	DZW10A	11
	80	310	200	160	135	-	20-3	-	8-Φ18	355	280	DZW10A	11.5
	100	350	220	180	155	-	20-3	-	8-Φ18	415	320	DZW15A	12.5
	125	400	250	210	185	-	22-3	-	8-Φ18	460	360	DZW20A	13
	150	480	285	240	210	-	22-3	-	8-Φ22	510	400	DZW30A	13.5
	200	600	340	295	265	-	24-3	-	12-Φ22	588	400	DZW45A	15
	250	650	405	355	320	-	26-3	-	12-Φ26	725	450	DZW60A	16
	300	750	460	410	375	-	28-4	-	12-Φ26	925	500	DZW90	18
	350	850	520	470	435	-	30-4	-	16-Φ26	1030	600	DZW120	19
	400	950	580	525	485	-	32-4	-	16-Φ30	1170	700	DZW180	21
	450	1050	640	585	545	-	40-4	-	20-Φ30	1220	800	DZW180	21.5
	500	1150	715	650	608	-	44-4	-	20-Φ33	1410	900	DZW250	22
	600	1350	840	770	718	-	54-5	-	20-Φ36	1610	1000	DZW350	25

国标截止阀
GB GLOBE VALVE

国标截止阀
GB GLOBE VALVE


主要外形尺寸及连接尺寸 Main external and connection dimension

HG/T 20592

公称压力 PN(MPa)	公称口径 DN(mm)	尺寸Size(mm)										电动装置型号 Electric device model	壁厚 Wall thickness
		L	D	D1	D2	D6	b-f	f2	Z-Φd	H	D0		
2.5	10	130	90	60	40	-	16-2	-	4-Φ14	198	120	-	6.4
	15	130	95	65	45	-	16-2	-	4-Φ14	218	120	-	6.4
	20	150	105	75	55	-	18-2	-	4-Φ14	258	140	-	6.4
	25	160	115	85	65	-	18-2	-	4-Φ14	275	160	-	6.4
	32	180	140	100	78	-	18-2	-	4-Φ18	280	180	-	6.4
	40	200	150	110	85	-	18-3	-	4-Φ18	330	200	-	6.4
	50	230	165	120	100	-	20-3	-	4-Φ18	350	240	DZW10A	7.9
	65	290	185	145	120	-	22-3	-	8-Φ18	400	280	DZW10A	11
	80	310	200	160	135	-	24-3	-	8-Φ18	355	280	DZW15A	11.5
	100	350	235	190	160	-	24-3	-	8-Φ22	415	320	DZW20A	12.5
	125	400	270	220	188	-	26-3	-	8-Φ26	460	360	DZW30A	13
	150	480	300	250	218	-	28-3	-	8-Φ26	510	400	DZW45A	13.5
	200	600	360	310	278	-	30-3	-	12-Φ26	710	400	DZW60A	15
	250	650	425	370	332	-	32-3	-	12-Φ30	786	450	DZW90	16
4.0	300	750	485	430	390	-	34-4	-	16-Φ30	925	500	DZW120	18
	350	850	555	490	448	-	38-4	-	16-Φ33	1030	600	DZW180	19
	400	950	620	550	505	-	40-4	-	16-Φ36	1170	700	DZW180	21
	450	1050	670	600	555	-	46-4	-	20-Φ36	1220	800	DZW250	21.5
	500	1150	730	660	610	-	48-4	-	20-Φ36	1450	900	DZW350	22
	600	1350	845	770	718	-	58-5	-	20-Φ39	1810	1000	DZW500	25
	10	130	90	60	40	35	16-2	4	4-Φ14	198	120	-	6.4
	15	130	95	65	45	40	16-2	4	4-Φ14	233	120	-	6.4
	20	150	105	75	55	51	18-2	4	4-Φ14	275	140	-	6.4
	25	160	115	85	65	58	18-2	4	4-Φ14	285	160	-	6.4
	32	180	140	100	78	66	18-2	4	4-Φ18	302	180	-	6.4
	40	200	150	110	85	76	18-3	4	4-Φ18	355	200	-	6.4
	50	230	165	125	100	88	20-3	4	4-Φ18	373	240	DZW10A	10
	65	290	185	145	120	110	22-3	4	8-Φ18	408	280	DZW10A	12
6.3	80	310	200	160	135	121	24-3	4	8-Φ18	436	320	DZW20A	12.5
	100	350	235	190	160	150	24-3	4.5	8-Φ22	480	360	DZW30A	13.5
	125	400	270	220	188	176	26-3	4.5	8-Φ26	558	400	DZW45A	14
	150	480	300	250	218	204	28-3	4.5	8-Φ26	611	400	DZW60A	16
	200	600	375	320	282	260	34-3	4.5	12-Φ30	720	400	DZW90	17
	250	650	450	385	345	313	38-3	4.5	12-Φ33	665	500	DZW120	18.5
	300	750	515	450	408	364	42-4	4.5	16-Φ33	720	550	DZW180	22
	350	850	580	510	465	422	46-4	5	16-Φ36	860	600	DZW180	25
	400	950	660	585	535	474	50-4	5	16-Φ39	1010	700	DZW250	27
	450	1050	685	610	560	524	37-4	5	20-Φ39	1190	800	DZW300	29
	500	1150	755	670	612	576	57-4	5	20-Φ42	1260	900	DZW500	30

注：电动或齿轮传动，价格另计。 Note: Electric or gear drive, the price extra.

J41W 6.3
C/I/P/R

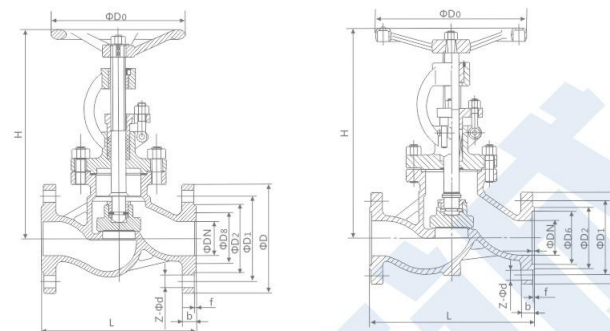

主要外形尺寸及连接尺寸 Main external and connection dimension

HG/T 20592


公称压力 PN(MPa)	公称口径 DN(mm)	尺寸Size(mm)										电动装置型号 Electric device model	壁厚 Wall thickness	
	L	D	D1	D2	D6	b-f	f2	Z-Φd	H	D0				
6.3	10	170	100	70	50	35	-	20-2	4	4-Φ14	198	120	-	7.9
	15	170	105	75	55	40	-	20-2	4	4-Φ14	195	140	-	7.9
	20	190	130	90	68	51	-	22-2	4	4-Φ18	228	160	-	7.9
	25	210	140	100	78	58	-	24-2	4	4-Φ18	275	180	-	7.9
	32	230	155	110	82	66	-	26-2	4	4-Φ22	325	200	-	8.6
	40	260	170	125	95	76	-	28-3	4	4-Φ22	360	240	-	9.4
	50	300	180	135	105	88	-	26-3	4	4-Φ22	410	280	DZW10A	11
	65	340	205	160	130	110	-	26-3	4	8-Φ22	450	320	DZW15A	13
	80	380	215	170	140	121	-	28-3	4	8-Φ22	485	360	DZW30A	14
	100	430	250	200	168	150	-	30-3	4.5	8-Φ26	537	400	DZW45A	15
	125	500	295	240	202	176	-	34-3	4.5	8-Φ30	631	400	DZW60A	15.5
	150	550	345	280	240	204	-	36-3	4.5	8-Φ33	646	450	DZW90	18
	200	650	415	345	300	260	-	42-3	4.5	12-Φ36	813	500	DZW120	21
	250	775	470	400	352	313	-	46-3	4.5	12-Φ36	985	550	DZW180	23
10.0	300	900	530	460	412	364	-	52-4	4.5	16-Φ36	1214	600	DZW250	25
	350	1025	600	525	475	422	-	56-4	5	16-Φ39	1432	650	-	28
	400	1150	670	585	525	474	-	60-4	5	16-Φ42	1650	700	-	30
	10	170	100	70	50	-	35	20-2	-	4-Φ14	198	120	-	7.9
	15	170	105	75	55	-	45	20-2	-	4-Φ14	202	140	-	7.9
	20	190	130	90	68	-	50	22-2	-	4-Φ18	228	160	-	7.9
	25	210	140	100	78	-	65	24-2	-	4-Φ18	250	180	-	7.9
	32	230	155	110	82	-	75	26-2	-	4-Φ22	326	220	-	8.6
	40	260	170	125	95	-	85	28-3	-	4-Φ22	359	240	-	9.4
	50	300	190	145	112	-	110	30-3	-	4-Φ26	414	280	DZW20A	13
	65	340	220	170	138	-	115	34-3	-	8-Φ26	434	320	DZW30A	14
	80	380	230	180	148	-	145	36-3	-	8-Φ26	547	400	DZW45A	18
	100	430	265	210	172	-	145	40-3	-	8-Φ30	621	450	DZW60A	20
	125	500	315	250	210	-	175	40-3	-	8-Φ33	732	450	DZW90	22
16.0	150	550	355	290	250	-	205	44-3	-	12-Φ33	840	500	DZW120	28
	200	650	430	360	312	-	265	52-3	-	12-Φ36	925	550	DZW180	30
	250	775	505	430	382	-	320	60-3	-	12-Φ39	1155	600	DZW250	32
	300	900	585	500	442	-	375	68-4	-	16-Φ42	1340	700	DZW300	35
	15	170	105	75	52	-	35	20-2	-	4-Φ14	148	140	-	12.7
	20	190	130	90	62	-	45	24-2	-	4-Φ18	156	160	-	12.7
	25	210	140	100	72	-	50	24-2	-	4-Φ18	125	180	-	12.7
	32	230	155	115	85	-	65	28-2	-	4-Φ22	200	200	-	14.2
	40	260	170	125	92	-	75	28-3	-	4-Φ22	231	240	-	18
	50	300	195	165	132	-	95	30-3	-	4-Φ26	262	250	DZW30A	19
	65	340	220	190	152	-	110	34-3	-	8-Φ26	303	320	DZW45A	22
	80	380	230	205	168	-	130	36-3	-	8-Φ26	341	400	DZW90	22
	100	430	265	240	200	-	160	40-3	-	8-Φ30	485	450	DZW120	26
	150	550	355	318	270	-	190	50-3	-	12-Φ33	630	550	DZW250	35
200	650	430	400	345	-	205	60-3	-	12-Φ36	775	700	DZW350	40	

注：电动或齿轮传动，价格另计。 Note: Electric or gear drive, the price extra.

美标截止阀 API GLOBE VALVE

美标截止阀 API GLOBE VALVE

J41^W_H-150Lb



标准 Standard

设计与制造	结构长度	法兰尺寸	对焊连接尺寸	压力-温度	试验-检验
ANSI B16.34 BS1873	ANSI B16.10	ANSI B16.5	ANSI B16.25	ANSI B16.34	API 598

压力试验 Pressure test

公称压力 PN(Lb)	强度试验		水密封试验		气密封试验	
	MPa	Lbf/in ²	MPa	Lbf/in ²	MPa	Lbf/in ²
150	3.0	430	2.2	315	0.4-0.7	60-100
300	7.7	1110	5.7	815		
600	15.3	2220	11.3	1630		
900	23.0	3330	17.0	2445		
1500	38.4	5560	28.2	4080		
2500	64.0	9255	47.0	6790		

主要零件材料及性能 Major parts material and the performance

体盖	阀杆	密封面	垫片 (环)	填料	工作温度	适用介质
WC8	2Cr13	CF8/13Cr/STL 本体材料/尼龙	增强柔性石墨 13Cr/柔性石墨 SFB-2 08 软钢 F304 F316 F304L F316L	柔性石墨 增强柔性石墨	≤ 425	水蒸汽油品
WC1					≤ 425	
WC6	38CrMoAl				≤ 540	
WC9	25Cr2MoV				≤ 570	
C5 C12					≤ 540	
CF8	F304				≤ 200	硝酸醋酸尿素
CF8M	F316					
CF3	F304L					
CF3M	F316L					

注：电动或齿轮传动，价格另计。Note: Electric or gear drive, the price extra.

主要尺寸和重量 Main dimensions and weight


DN			150Lb 凸面法兰 (RF) 主要尺寸 (mm)								重量
mm	in	L	D	D1	D2	b	N-Φd	H	D0		
15	1/2	108	89	60.5	35	11.2	4-16	241	100	6.9	
20	3/4	117	98	69.9	43	12.7	4-16	241	100	9.8	
25	1	127	108	79.2	51	14.2	4-16	242	125	13.5	
32	1 1/4	140	117	89	63	16	4-16	280	160	19.5	
40	1 1/2	165	127	98.6	73	17.5	4-16	286	160	28.5	
50	2	203	152	120.7	92	19	4-19	368	200	18	
65	2 1/2	216	178	139.7	105	22.4	4-19	387	200	30	
80	3	241	190	152.4	127	24	4-19	411	250	41	
100	4	292	229	190.5	157	24	4-19	454	250	64	
125	5	356	254	216.0	186	24	8-22.5	455	350	86	
150	6	406	279	241.3	216	25.4	8-22.5	541	350	113	
200	8	495	343	298.5	270	28.4	8-22.5	651	450	178	
250	10	622	406	362.0	324	30.2	12-25.4	800	450	270	
300	12	698	483	431.8	381	32	12-25.4	1231	600	350	
350	14	787	533	476.3	413	35	12-29	1450	600	460	
400	16	914	597	539.8	470	36.6	16-29	1645	600	590	

DN		300Lb 凸面法兰 (RF) 主要尺寸 (mm)									重量
mm	in	L	D	D1	D2	B	N-Φd	H	D0		
15	1/2	152	95	66.5	35	14.2	4-16	241	140	7.7	
20	3/4	178	117	82.5	43	16	4-19	241	140	11.3	
25	1	203	123	89	51	17.5	4-19	283	160	16.8	
32	1 1/4	216	133	98.5	63	19	4-19	320	200	21.2	
40	1 1/2	229	155	114.3	73	20.6	4-22.5	322	200	32.6	
50	2	267	165	127	92	22.4	8-19	399	200	25	
65	2 1/2	292	190	149.4	105	25.4	8-22.5	438	250	30	
80	3	318	210	168.1	127	28.4	8-22.5	464	280	35	
100	4	356	254	200.2	157	31.8	8-22.5	565	350	56	
125	5	400	279	235	186	35	8-22.5	614	350	96	
150	6	444	318	269.7	216	36.6	12-25.4	717	400	120	
200	8	559	381	330.2	270	41.2	12-25.4	930	500	212	
250	10	622	444	387.4	324	47.8	16-28.5	1012	550	330	
300	12	711	521	450.8	381	50.8	16-32	1231	600	472	
350	14	838	584	514.4	413	54	20-32	1450	600	715	
400	16	864	648	571.5	470	57.2	20-35	1645	600	920	

DN		600Lb 凸面法兰 (RF) 主要尺 (mm)									重量
mm	in	L	D	D1	D2	B	N-Φd	H	D0		
15	1/2	165	95	66.5	35	14.5	4-16	285	100	7.8	
20	3/4	190	117	82.5	43	16	4-19	285	125	12.5	
25	1	216	124	89	51	17.5	4-19	313	160	17.5	
32	1 1/4	229	133	98.5	63	21	4-19	328	160	23.5	
40	1 1/2	241	156	114.3	73	22.5	4-22.5	365	180	38.5	
50	2	292	165	127	92	33	8-19	444	200	35	
65	2 1/2	330	190	149.4	105	36	8-22.5	483	250	50	
80	3	356	210	168.1	127	39	8-22.5	533	250	60	
100	4	432	273	216	157	45	8-25.4	622	350	110	
125	5	508	330	266.7	186	52	8-28.5	750	350	200	
150	6	559	356	292.1	216	55	12-28.5	800	450	230	
200	8	660	419	349.3	270	63	12-32	927	500	410	
250	10	787	508	431.8	324	71	16-35	1257	600	625	
300	12	838	559	489	381	74	20-35	1468	680	860	

不锈钢氧气专用截止阀 STAINLESS STEEL OXYGEN SPECIAL GLOBE VALVE

YJ41H-25-40P/T

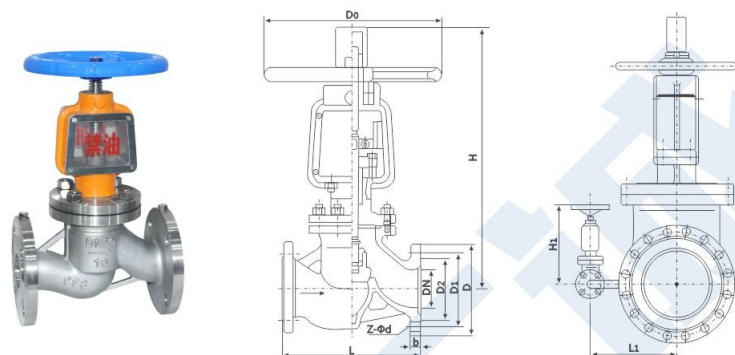

PN25 不锈钢氧气专用截止阀

JB/T79.1
单位Unit:mm

公称通径 DN	主要外形尺寸和连接尺寸 (mm) Main External and Connection Dimension									
	L	D	D1	D2	b	Z-Φd	Do	H	H1	L1
15	130	95	65	45	16	4-14	100	190	-	-
20	150	105	75	55	16	4-14	100	213	-	-
25	160	115	85	65	16	4-14	125	236	-	-
32	180	135	100	78	18	4-18	182	312	-	-
40	200	145	115	85	18	4-18	160	328	-	-
50	230	160	125	100	20	4-18	320	450	-	-
65	290	180	145	120	22	8-18	360	530	-	-
80	310	195	160	135	22	8-18	400	560	-	-
100	350	230	190	160	24	8-23	450	618	-	-
125	400	270	220	188	28	8-25	450	675	-	-
150	480	300	250	218	30	8-25	560	743	-	-
200	600	360	310	278	34	12-25	640	850	-	-
250	650	425	370	332	36	12-30	720	975	340	330
300	750	485	430	390	40	16-30	800	1115	340	415
400	950	610	550	505	48	16-34	900	1330	340	465

不锈钢氧气专用截止阀 STAINLESS STEEL OXYGEN SPECIAL GLOBE VALVE


PN40 不锈钢氧气专用截止阀

JB/T79.2
单位Unit:mm

公称通径 DN	主要外形尺寸和连接尺寸 (mm) Main External and Connection Dimension										
	L	D	D1	D2	D6	b	Z-Φd	Do	H	H1	L1
15	130	95	65	45	40	16	4-14	100	202	-	-
20	150	105	75	55	51	16	4-14	100	225	-	-
25	160	115	85	65	58	16	4-14	125	236	-	-
32	180	135	100	78	66	18	4-18	180	312	-	-
40	200	145	110	85	76	18	4-18	160	328	-	-
50	230	160	125	100	88	20	4-18	320	450	-	-
65	290	180	145	120	110	22	8-18	360	530	-	-
80	310	195	160	135	121	22	8-18	400	560	-	-
100	350	230	190	160	150	24	8-23	450	618	-	-
125	400	270	220	188	176	28	8-25	450	675	-	-
150	480	300	250	218	204	30	8-25	560	743	-	-
200	600	375	320	282	260	38	12-30	640	850	-	-
250	650	445	385	345	313	42	12-34	720	975	380	340
300	750	510	450	408	364	46	16-34	800	1115	415	340
400	950	655	585	535	474	58	16-41	900	1425	465	340

法兰氨用截止阀 GLOBE VALVE FOR FLANGE AMMONIA

J41B

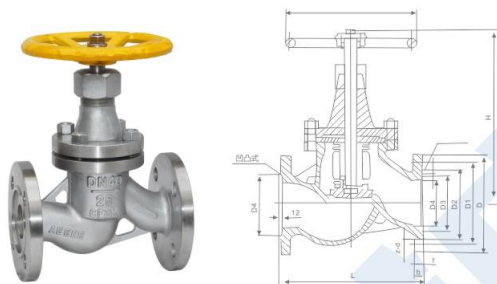

试验压力 Test pressure

公称压力PN(MPa)	试验压力(MPa)	
	壳体强度试验	密封试验
1.6	2.4	1.76
2.5	3.75	2.75

主要零件材料 Major parts material


产品类型	零件名称				
	阀杆	填料	密封面	垫片	紧固件
J41B-16/25C	碳钢、不锈钢	聚四氟乙烯	巴氏合金/PTFE	石棉橡胶板	优质碳钢
J41B-16/25Q	碳钢、不锈钢	聚四氟乙烯	巴氏合金/PTFE	石棉橡胶板	优质碳钢
J41B-16/25K	碳钢、不锈钢	聚四氟乙烯	巴氏合金/PTFE	石棉橡胶板	优质碳钢

主要外形尺寸及连接尺寸 Main external and connection dimension

公称通径 DN(mm)	主要外形尺寸及连接尺寸(mm)										
	L	D	D1	D2	D6	b	f	f2	z-d	H	D0
	J41B-16C J41B-16Q J41B-16K										
10	130	90	60	40	35	14	2	4	4-14	196	120
15	130	95	65	45	40	14	2	4	4-14	196	120
20	150	105	75	55	51	16	2	4	4-14	196	140
25	160	115	85	65	58	16	2	4	4-14	204	160
32	180	135	100	78	66	18	2	4	4-18	208	160
40	200	145	110	85	76	18	3	4	4-18	248	200
50	230	160	125	100	88	20	3	4	4-18	248	200
65	290	180	145	125	110	22	3	4	4-18	321	240
80	310	195	160	135	121	24	3	4	8-18	325	240
100	350	215	180	155	150	24	3	4.5	8-18	371	280
125	400	245	210	185	176	26	3	4.5	8-18	400	320
150	480	280	240	210	204	26	3	4.5	8-23	432	320
200	600	335	295	265	260	30	3	4.5	12-23	654	400
250	650	405	335	320	313	32	3	4.5	12-25	745	500
300	700	460	410	375	364	34	3	4.5	12-25	852	600

042

BJ45H/Y-15-40C/P/R

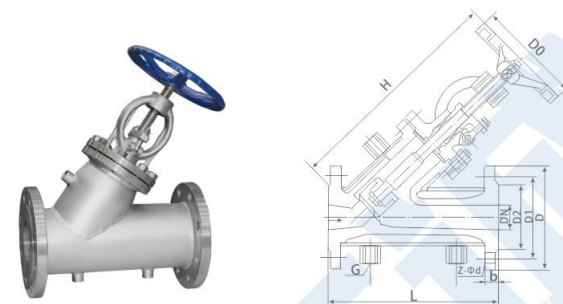

主要外形和连接尺寸 Main external and connection dimension


单位Unit:mm

公称通径 DN	PN2.5/4.0MPa							G	H	D0	WT (kg)
	L	D	D1	D2	D6	b	Z-φd				
	BJ45H-25 BJ45Y-25P BJ45Y-25R BJ45Y-25R3										
15	200	105	75	55	-	16	4-Φ14	1/2"	210	120	15
20	220	115	85	65	-	16	4-Φ14	1/2"	240	140	21
25	220	135	100	78	-	18	4-Φ18	1/2"	250	160	25
32	250	145	110	85	-	18	4-Φ18	1/2"	270	160	30
40	270	160	125	100	-	20	4-Φ18	1/2"	310	160	36
50	300	180	145	120	-	22	8-Φ18	3/4"	330	240	40
65	350	195	160	135	-	22	8-Φ18	3/4"	360	240	54
80	380	230	190	160	-	24	8-Φ23	3/4"	400	280	70
100	430	270	220	188	-	28	8-Φ25	1"	480	320	100
125	490	300	250	218	-	30	8-Φ25	1"	550	360	130
150	570	330	280	248	-	32	12-Φ25	1"	620	300	170
200	690	395	340	302	-	36	12-Φ30	1"	750	400	250
	BN45H-40 BJ45HY-40P BJ45Y-40R BJ45Y-40R3										
15	200	105	75	55	51	16	4-Φ14	1/2"	210	120	18
20	220	115	85	65	58	16	4-Φ14	1/2"	240	140	21
25	220	135	100	78	66	18	4-Φ18	1/2"	250	160	25
32	250	145	110	85	76	18	4-Φ18	1/2"	270	160	33
40	270	160	125	100	88	20	4-Φ18	1/2"	310	160	41
50	300	180	145	120	110	22	8-Φ18	3/4"	330	240	45
65	350	195	160	135	121	22	8-Φ18	3/4"	360	240	62
80	380	230	190	160	150	24	8-Φ23	3/4"	400	280	80
100	430	270	220	188	176	28	8-Φ25	1"	480	320	100
125	490	300	250	218	204	30	8-Φ25	1"	550	360	130
150	570	350	295	258	234	34	12-Φ30	1"	620	300	185
200	690	415	355	315	287	40	12-Φ34	1"	750	400	168

043

低温截止阀 CRYOGENIC VALVE

DJ41F-16/40P

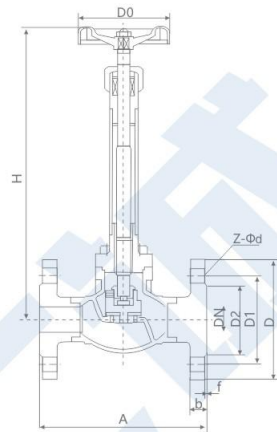


主要外形和连接尺寸 Main external and connection dimension

通径 DN (mm)	主要连接尺寸 Main connecting dimensions										参考重量 (kg)
	A	H1	H2	D	D1	D2	Z-φd	b	f	D0	
10	130	253	247	90	60	40	4-14	16	2	75	3.2
15	130	268	260	95	65	45	4-14	16	2	75	3.8
20	150	307	297	105	75	55	4-14	16	2	100	5.5
25	160	323	310	115	85	65	4-14	16	2	100	5.9
32	180	362	346	135	100	78	4-18	18	2	120	7.1
40	200	380	360	145	110	85	4-18	18	2	120	11.2
50	230	445	420	160	125	100	4-18	20	3	160	17.5
65	290	473	440	180	145	120	8-18	20	3	200	18.4
80	310	510	470	195	160	135	8-18	22	3	240	30.1
100	350	589	539	215	180	155	8-18	22	3	280	40.2
125	400	665	602	245	210	185	8-18	24	3	300	53.9
150	480	713	638	280	240	210	8-23	26	3	350	68.3
200	600	805	705	375	295	265	12-23	30	3	400	134.2
250	650	985	860	405	355	320	12-25	32	3	550	248.7
300	750	1080	930	460	410	370	12-25	34	4	650	334.5

角式截止阀 ANGLE GLOBE VALVE

J44H/Y/W-1.6/2.5 C/P/R/L



试验压力 Test Pressure

公称压力 PN(MPa) Nominal pressure	试验压力(MPa) Test pressure			
	壳体 Shell	密封(液) Seal	密封(气) Seal	上密封 Back seat
1.6	2.4	1.8	0.6	1.8
2.5	3.8	2.8	0.6	2.8
4.0	6.0	4.4	0.6	4.4
6.4	9.6	7.0	0.6	7.0
10.0	15.0	11.0	0.6	11.0
16.0	24.0	18.0	0.6	18.0

适用范围 Suitable Scope

壳体材料 Shell material	适用介质 Applicable medium	适用温度℃ Applicable temperature
碳素钢(C型) Carbon steel(I type)	水、蒸汽、油品 Water, steam, oil goods	≤425
铬镍钛钢(P型) Cr.Ni.Ti steel(P type)	硝酸类 Nitric acid	≤200
铬镍钛钢(R型) Cr.Ni.Mo.Ti steel(R type)	醋酸类 Acetic acid	≤200
铬钼钢(I型) Cr.Mo steel(I type)	水、蒸汽、油品 Water, steam, oil goods	≤550

角式截止阀 Angled Globe Valves

公称通径 DN (mm)	主要连接尺寸 Main connecting dimensions									
	L	D	D1	D2	b	f	Z-φd	D0	H1	H2
25	160	115	85	65	18	3	4-14	100	220	236
32	180	135	100	78	18	3	4-18	120	251	273
40	200	145	110	85	20	3	4-18	140	283	306
50	230	160	125	100	20	3	4-18	160	316	344
65	290	180	145	120	22	3	4-18	180	353	383
80	310	195	160	135	22	3	8-18	200	437	479
100	350	215	180	155	24	3	8-18	240	479	529
125	400	245	210	180	26	3	8-18	280	542	608
150	480	280	240	210	28	4	8-18	320	605	680
200	600	335	295	265	30	4	12-23	360	650	755