

BALL VALVE SERIES 球阀系列

产品材质Product material:
WCB, A105, LCB, LF2, WC6, F11, WC9, F22, QT450, ZG1Cr5Mo, F5, ZG20CrMoV, ZG15Cr1Mo1V, 12Cr1MoV, C12A, F91, F92, CF8, F304, CF8M, F316, CF3, F304L, CF3M, F316L, CF8C, F347, F304H, F316H, F321H, 4A, F51, 5A, F53, Inconel, Monel, 铜合金(Copper alloy), 钛合金(Titanium alloy), 哈氏合金(Hastelloy alloy), 镍合金(Nickel alloy)等

制造标准Manufacturer's standard: GB, DIN, API, ANSI, JIS, BS等
公称通径Nominal Diameter: 10mm~4000mm及1/2"~160"
工作压力Working pressure: 0.25MPa~76.0MPa/150Lb~4500Lb/10K~320K
工作温度Operation temperature: -196°C~816°C

适用工况: 石油、化工、天然气、电站、核电、军工、市政、冶金、建筑、制药、造纸、煤矿、水泥、排污、环保、新能源等行业

Applicable working conditions: petroleum, chemical, natural gas, power plants, nuclear power, military, municipal, metallurgical, construction, pharmaceutical, papermaking, coal mining, cement, pollution discharge, environmental protection, new energy and other industries



国标法兰球阀
GB Flanged Ball Valve



国标高平台法兰球阀
GB High Platform Flange Ball Valve



美标球阀
API Ball Valve



日标球阀
JIS Ball Valve



德标球阀
DIN Ball Valve



放料球阀
Discharge Ball Valve



一体式高温球阀
Integrated High Temperature Ball Valve



三通球阀
Three Way Ball Valve



对夹薄型球阀
Water Thin Ball Valve



蜗轮浮动球阀
Worm Gear Floating Ball Valve



固定球阀
Trunnion Mounted Ball Valve



氧气专用球阀
Oxygen Dedicated Ball Valve



气动法兰球阀
Pneumatic Flange Ball Valve



电动法兰球阀
Electric Flange Ball Valve




电动三通法兰球阀
Electric 3-way Flange Ball Valve



高平台V型球阀
High Platform V-shaped Ball Valve

国标浮动球阀
GB FLOATING BALL VALVE

Q41/641/941F-16C/P/R/L

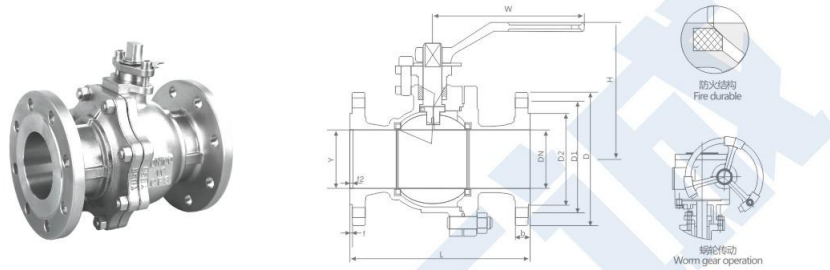

主要外形和连接尺寸 Main external and connection dimension

单位Unit:mm

公称通径 DN	主要外形和连接尺寸 Main external and connecting dimensions									WT (kg)
	L	D	D1	D2	b	f	Z-Φd	H	W	
	Q41F-16C	Q41F-16P	Q641F-16C	Q641F-16P	Q9B41F-16C	Q9B41F-16P				
15	130	95	65	45	14	2	4-Φ14	78	140	3
20	140	105	75	55	14	2	4-Φ14	84	160	4
25	150	115	85	65	14	2	4-Φ14	95	180	5
32	165	135	100	78	17	2	4-Φ18	150	250	9
40	180	145	110	85	17	2	4-Φ18	150	300	11
50	200	160	125	100	18	2	4-Φ18	170	350	15
65	220	180	145	120	19	2	4-Φ18	195	350	19
80	250	195	160	135	20	2	8-Φ18	215	400	27
100	280	215	180	155	21	2	8-Φ18	250	500	38
125	320	245	210	185	22	3	8-Φ18	265	600	58
150	360	280	240	210	24	3	8-Φ23	270	800	81
200	400	335	295	265	26	3	12-Φ23	330	800	95
250	533	405	355	320	28	3	12-Φ25	450	1300	140

国标浮动球阀
GB FLOATING BALL VALVE

Q41/341/641/941P-25~64

JB/T 79.2-1994 JB/T 79.1-1994


主要外形和连接尺寸 Main external and connection dimension

单位Unit:mm

公称通径 DN	主要外形和连接尺寸 Main external and connecting dimensions										WT (kg)
	L	D	D1	D2	b	Y	f2	Z-Φd	H	W	
	Q41F-25	Q41F-25P	Q341F-25	Q341F-25P	Q641F-25	Q641F-25P	Q9B41F-25	Q9B41F-25P			
15	130	95	65	45	16	-	-	4-Φ14	103	100	3
20	140	105	75	55	16	-	-	4-Φ14	112	160	4
25	150	115	85	65	16	-	-	4-Φ14	123	160	6
32	165	135	100	78	18	-	-	4-Φ18	150	250	10
40	180	145	110	85	18	-	-	4-Φ18	156	250	14
50	200	160	125	100	20	-	-	4-Φ18	172	350	20
65	220	180	145	120	22	-	-	8-Φ18	197	350	25
80	250	195	160	135	22	-	-	8-Φ18	222	450	30
100	280	230	190	160	24	-	-	8-Φ23	253	450	40
125	320	270	220	188	28	-	-	8-Φ25	275	600	65
150	360	300	250	218	30	-	-	8-Φ25	286	800	85
200	400	360	310	278	34	-	-	12-Φ25	340	1200	100
250	533	425	370	332	36	-	-	12-Φ30	470	1400	165
	Q41F-40	Q41F-40P	Q341F-40	Q341F-40P	Q641F-40	Q641F-40P	Q9B41F-40	Q9B41F-40P			
15	130	95	65	45	16	40	4	4-Φ14	103	100	3
20	140	105	75	55	16	51	4	4-Φ14	112	160	4
25	150	115	85	65	16	58	4	4-Φ14	123	160	6
32	180	135	100	78	18	66	4	4-Φ18	150	250	10
40	200	145	110	85	18	76	4	4-Φ18	156	250	14
50	220	160	125	100	20	88	4	4-Φ18	172	350	20
65	250	180	145	120	22	110	4	8-Φ18	197	350	25
80	280	195	160	135	22	121	4	8-Φ18	222	450	30
100	320	230	190	160	24	150	4.5	8-Φ23	253	450	40
125	400	270	220	188	28	176	4.5	8-Φ25	275	600	65
150	400	300	250	218	30	204	4.5	8-Φ25	286	800	85
200	550	375	320	282	38	260	4.5	12-Φ30	340	1200	100
250	568	445	385	345	42	313	4.5	12-Φ34	470	1400	165
	Q41F-63	Q41F-63P	Q341F-63	Q341F-63P	Q641F-63	Q641F-63P	Q9B41F-63	Q9B41F-63P			
15	140	105	75	55	18	40	4	4-Φ14	105	130	3.1
20	155	125	90	68	20	51	4	4-Φ18	125	130	4.9
25	180	135	100	78	22	58	4	4-Φ18	135	160	7.2
32	200	150	110	82	24	66	4	4-Φ23	150	160	8.7
40	220	165	125	95	24	76	4	4-Φ23	165	230	12.1
50	250	175	135	105	26	88	4	4-Φ23	175	230	16.7
65	280	200	160	130	28	110	4	8-Φ23	200	400	28.2
80	320	210	170	140	30	121	4	8-Φ23	210	400	36
100	350	250	200	168	32	150	4.5	8-Φ25	250	700	66
125	455	295	240	202	36	176	4.5	8-Φ30	295	1100	98
150	495	340	280	240	38	204	4.5	8-Φ34	340	1500	142
	Q41F-100	Q41F-100P	Q341F-100	Q341F-100P	Q641F-100	Q641F-100P	Q9B41F-100	Q9B41F-100P			
15	140	105	75	55	20	40	4	4-Φ14	105	130	3.1
20	155	130	90	68	22	51	4	4-Φ18	125	130	4.9
25	180	140	100	78	24	58	4	4-Φ18	135	160	7.2
32	200	155	110	82	26	66	4	4-Φ23	150	160	8.7
40	220	170	125	95	28	76	4	4-Φ23	165	230	12.1
50	250	195	135	105	30	88	4	4-Φ23	175	230	16.7
65	280	220	160	130	34	110	4	8-Φ23	200	400	28.2
80	320	230	170	140	36	121	4	8-Φ23	210	400	36
100	350	265	200	168	40	150	4.5	8-Φ25	250	700	66
125	455	315	240	202	40	176	4.5	8-Φ30	295	1100	98
150	495	355	280	240	44	204	4.5	8-Φ34	340	1500	142

美标法兰球阀 ANSI/ASME FLANGE BALL VALVE

美标法兰球阀 ANSI/ASME FLANGE BALL VALVE

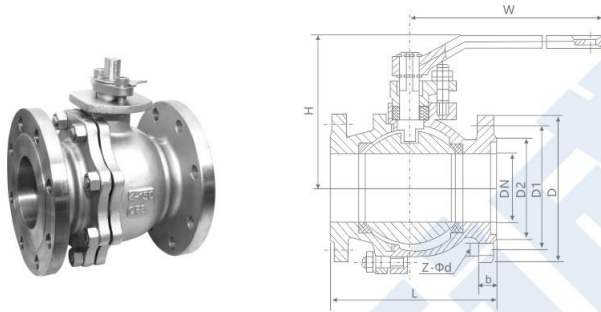

标准

设计与制造按BS5351, ANSI B16.34
结构长度按ANSI B16.10
法兰连接尺寸按ANSI B16.5
压力温度额定值按ANSI B16.34
检验按API 598

STANDARDS

Design and manufacture as BS5351, ANSI B16.34
Face to face dimensions as ANSI B16.10
End flange dimension as ANSI B16.5
Pressure-temperature rating as ANSI B16.34
Pressure test as API 598

试验压力 Test Pressure

试验项目 Test Item		壳体试验 Shell Test		密封试验 Seal Test		气密封试验 Air Seal Test	
介质Medium		水Water				气Air	
单位Unit		MPa	lbf/in ²	MPa	lbf/in ²	MPa	lbf/in ²
压力等级 (磅级) Pressure (Class)	150	3.1	450	2.2	315	0.5~0.7	60~100
	300	7.8	1125	5.6	815		
	400	10.3	1500	7.6	1100		
	600	15.3	2225	11.2	1630		
	900	23.1	3350	16.8	2440		

主要零件材料 Materials for Main Parts


名称Name	材料Material								
阀体Body 阀盖Bonnet	A216 WCB	A352 LCB	A217 WC6	A217 WC9	A217 C5	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M
球体Ball	A182 F6	A182 F304					A182 F316	A182 F304L	A182 F316L
阀杆Stem	A182 F6	A182 F304					A182 F316	A182 F304L	A182 F316L
手柄Hand Handle	KTH350-10								
螺栓Bonnet Bolt	A193-B7 A320-L7 A193-B8								
螺母Nut	A194-2H A194-7 A194-8								

主要连接尺寸 Main Connection Dimensions

型号 Type	型号规格 Size(mm)		尺寸 Dimension(mm)							
	Inch	DN	L	D	D1	D2	b	z-Φd	H	W
Q41H-150Lb Q341H-150Lb Q641H-150Lb	1/2"	15	108	90	60.3	34.9	11.6	4-16	68	115
	3/4"	20	117	100	69.9	42.9	13.2	4-16	75	130
	1"	25	127	110	79.4	50.8	14.7	4-16	85	150
	1 1/4"	32	140	115	88.9	63.5	16.3	4-16	96	190
	1 1/2"	40	165	125	98.4	73	17.9	4-16	107	230
	2"	50	178	150	120.7	92.1	19.5	4-19	118	240
	2 1/2"	65	190	180	139.7	104.8	22.7	4-19	145	280
	3"	80	203	190	152.4	127	24.3	4-19	160	310
	4"	100	229	230	190.5	157.2	24.3	4-19	185	330
	5"	125	356	255	215.9	185.7	24.3	8-22	230	600
Q41H-300Lb Q341H-300Lb Q641H-300Lb	6"	150	394	280	241.3	215.9	25.9	8-22	260	800
	8"	200	457	345	298.5	269.9	29	8-22	310	1000
	10"	250	533	405	362	323.8	30.6	12-25	350	1200
	1/2"	15	140	95	66.7	34.9	14.7	4-16	72	115
	3/4"	20	152	115	82.6	42.9	16.3	4-19	75	130
	1"	25	165	125	88.9	50.8	17.9	4-19	85	150
	1 1/4"	32	178	135	98.4	63.5	19.5	4-19	95	180
	1 1/2"	40	190	155	114.3	73	21.1	4-22	110	230
	2"	50	216	165	127	92.1	22.7	8-19	120	240
	2 1/2"	65	241	190	149.2	104.8	25.9	8-22	120	280
Q41H-600Lb Q341H-600Lb Q641H-600Lb	3"	80	283	210	168.3	127	29	8-22	150	310
	4"	100	305	255	200	157.2	32.2	8-22	165	330
	5"	125	381	280	235	185.7	35.4	8-22	190	600
	6"	150	403	320	269.9	215.9	37	12-22	270	800
	8"	200	502	380	330.2	269.9	41.7	12-25	315	1000
	10"	250	568	445	387.4	323.8	48.1	16-29	380	1200
	1/2"	15	165	95	66.7	34.9	16.3	4-16	88	115
	3/4"	20	190	115	82.6	42.9	17.9	4-19	98	130
	1"	25	216	125	88.9	50.8	19.5	4-19	105	150
	1 1/2"	40	241	155	114.3	73	24.3	4-22	135	180
Q41H-600Lb Q341H-600Lb Q641H-600Lb	2"	50	292	165	127	92.1	27.4	8-19	155	240
	2 1/2"	65	330	190	149	105	29	8-22	155	280
	3"	80	356	210	168.3	127	33.8	8-22	175	310
	4"	100	432	275	215.9	157.2	40.1	8-25	210	330
	5"	125	508	330	267	186	44.5	8-29	255	600
	6"	150	559	355	292.1	215.9	49.7	12-29	340	800
	8"	200	660	420	349.2	269.9	57.6	12-32	400	1000
	10"	250	787	510	431.8	323.8	65.5	16-35	440	1200

二片式国标压盖高平台法兰球阀

2-PC BALL VALVE FLANGE END GB DIRECT MOUNTING PAD

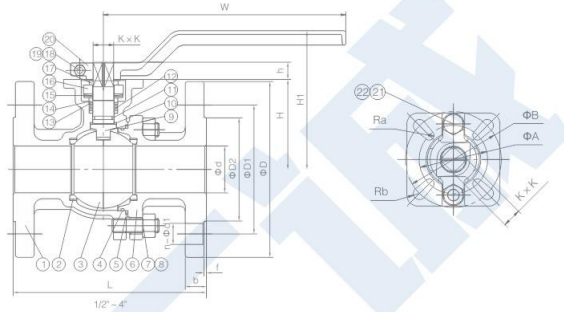

特征 Features

全通径Full port, 1/2"~12" (DN15~DN300)
工作压力W.P.: PN16/40
工作温度W.T.: -20°C~180°C
精密铸造 Investment casting
防静电装置 (可选) Anti-static device (option)
带锁手柄 Locking device handle
ISO5211直装高平台设计 ISO 5211 Direct mounting pad
API 607 防火结构 (可选) API 607 Fire safe(option)
自动化装置 (可选) Automation accessories(option)

JB PN16

设计标准 Design: GB/T 12237
法兰标准 Flange dimension: JB/T79.1
结构长度 Face to face: JB/T 1686
检验 & 测试 Inspection & testing: GB/T 13927, JB/T 9092

HG PN16/40

设计标准 Design: GB/T 12237
法兰标准 Flange dimension: HG/T 20592
结构长度 Face to face: GB/T 12221
检验 & 测试 Inspection & testing: GB/T 13927, JB/T 9092

材料列表 Material List

序号 No.	零件名称 PARTS	材料 MATERIAL		
1	阀体 BODY	WCB	CF8	CF8M
2	阀座 SEAT	PTFE		
3	球体 BALL	CF8	CF8	CF8M
4	O 形圈 O-RING	FFM		
5	垫片 GASKET	PTFE		
6	阀盖 BONNET	WCB	CF8	CF8M
7	螺栓 BOLT	304		
8	螺母 NUT	304		
9	阀杆 STEM	304	304	316
10	阀杆垫圈 STEM WASHER	PTFE+25% GF		
11	O 形圈 O-RING	FFM		
12	填料 PACKING	PTFE		
13	耐磨垫 WEAR WASHER	PTFE+25% GF		
14	压圈 GLAND	304		
15	蝶形弹簧 DISC SPRING	304		
16	压板 GLAND FLANGE	CF8		
17	定位片 STOPPER	304		
18	内六角螺钉 HEX SOCKET BOLT	304		
19	螺母 NUT	304		
20	手柄 HANDLE	WCB/CF8		
21	螺栓 BOLT	304		
22	螺母 NUT	304		

二片式国标压盖高平台法兰球阀

2-PC BALL VALVE FLANGE END GB DIRECT MOUNTING PAD

尺寸列表 Dimensions G22 机械部 JB PN16

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15 1/2"	130	15	45	65	95	14	2	4-14	51	9	83	140	3.0	3.5	36	50	9X9
20 3/4"	140	20	55	75	105	14	2	4-14	56	9	88	140	3.0	3.5	36	50	9X9
25 1"	150/140	25	65	85	115	14	2	4-14	62	11	97	170	3.0	3.5	42	50	11X11
32 1-1/4"	165	32	78	100	135	16	2	4-18	72	11	107	170	3.0	3.5	42	50	11X11
40 1-1/2"	180	40	85	110	145	16	3	4-18	78	14	116	200	3.5	4.5	50	70	14X14
50 2"	200	50	100	125	160	16	3	4-18	86	14	124	200	3.5	4.5	50	70	14X14
65 2-1/2"	220	65	120	145	180	18	3	4-18	102	17	146	300	4.5	5.5	70	102	17X17
80 3"	250	80	135	160	195	20	3	8-18	115	17	159	300	4.5	5.5	70	102	17X17
100 4"	280	100	155	180	215	20	3	8-18	137	17	181	300	4.5	5.5	70	102	17X17
125 5"	320	125	185	210	250	22	3	8-18	170	25	255	650	5.5	6.5	102	125	22X22
150 6"	360	150	210	240	280	24	3	8-23	192	30	277	800	5.5	6.5	102	125	27X27
200 8"	400	200	265	295	335	26	3	12-23	234	35	280	300	5.5	6.5	102	125	27X27

尺寸列表 Dimensions G2S 化工部短系列 HG Short series PN16

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15 1/2"	108	15	45	65	95	16	2	4-14	55	9	87	140	3.0	3.5	36	50	9X9
20 3/4"	117	20	58	75	105	18	2	4-14	60	9	92	140	3.0	3.5	36	50	9X9
25 1"	127	25	68	85	115	18	2	4-14	67	11	102	170	3.0	3.5	42	50	11X11
32 1-1/4"	140	32	78	100	140	18	2	4-18	76	11	111	170	3.0	3.5	42	50	11X11
40 1-1/2"	165	40	88	110	150	18	2	4-18	85	14	123	200	3.5	4.5	50	70	14X14
50 2"	178	50	102	125	165	18	2	4-18	93	14	131	200	3.5	4.5	50	70	14X14
65 2-1/2"	190	65	122	145	185	18	2	8-18	113	17	157	300	4.5	5.5	70	102	17X17
80 3"	203	80	138	160	200	20	2	8-18	126	17	170	300	4.5	5.5	70	102	17X17
100 4"	229	100	158	180	220	20	2	8-18	141	17	185	300	4.5	5.5	70	102	17X17
125 5"	356	125	188	210	250	22	2	8-22	170	25	255	650	5.5	6.5	102	125	22X22
150 6"	394	150	212	240	285	22	2	8-22	192	30	277	800	5.5	6.5	102	125	27X27
200 8"	457	200	268	295	340	24	2	8-22	234	35	280	300	5.5	6.5	102	125	27X27

尺寸列表 Dimensions G21 化工部长系列 HG Long series PN16

单位 Unit: mm

尺寸 Nominal Diameter	L	d	D2	D1	D	b	f	n-φd1	H	h	H1	W	Ra	Rb	A	B	K×K
15 1/2"	130	15	45	65	95	16	2	4-14	55	9	87	140	3.0	3.5	36	50	9X9
20 3/4"	140	20	58	75	105	18	2	4-14	60	9	92	140	3.0	3.5	36	50	9X9
25 1"	150/140	25	68	85	115	18	2	4-14	67	11	102	170	3.0	3.5	42	50	11X11
32 1-1/4"	165	32	78	100	140	18	2	4-18	76	11	111	170	3.0	3.5	42	50	11X11
40 1-1/2"	165	40	88	110	150	18	2	4-18	85	14	123	200	3.5	4.5	50	70	14X14
50 2"	203	50	102	125	165	18	2	4-18	93	14	131	200	3.5	4.5	50	70	14X14
65 2-1/2"	222	65	122	145	185	18	2	8-18	113	17	157	300	4.5	5.5	70	102	17X17
80 3"	241	80	138	160	200	20	2	8-18	126	17	170	300	4.5	5.5	70	102	17X17
100 4"	305	100	158	180	220	20	2	8-18	141	17	185	300	4.5	5.5	70	102	17X17
125 5"	320	125	188	210	250	22	2	8-22	170	25	255	650	5.5	6.5	102	125	22X22
150 6"	360	150	212	240	285	22	2	8-22	192	30	277	800	5.5	6.5	102	125	27X27
200 8"	400	200	268	295	340	24	2	12-22	234	35	280	300	5.5	6.5	102	125	27X27

Q47F/Y/H型固定式球阀 FIXED BALL VALVE

执行标准 Implementation of standards

- 1、设计和制造 Design and manufacture : GB/T 12237/API 608
- 2、检验和试验 Inspection and test : GB/T 26480-2011/API 598
- 3、法兰连接 Flange connection : HG/T 20592-2009/ASME/ANSI B 16.5
- 4、结构长度 Structure length : GB/T 12221-2005/ASME/ANSI B 16.10

性能规范 Performance Specifications

试验压力 Test pressure 单位 Unit : MPa

公称压力 PN	常温最大工作压力 Max temperature Working pressure	壳体 试验压力 Case Test pressure	气密封 试验压力 Gas Seals test pressure	高压密封 试验压力 High-pressure sealing Test pressure
1.6	1.6	2.4	0.6	1.76
2.5	2.5	3.8	0.6	2.75
4.0	4.0	6.0	0.6	4.4
6.4	6.4	9.6	0.6	7.1
Class 150	2.0	3.0	0.6	2.2
Class 300	5.0	7.5	0.6	5.5


使用范围 Terms of Use

壳体材料 Shell material	阀座材料 Seat material	适用温度 Applicable temperature	适用介质 Applicable media
碳钢C型 Carbon Steel C	聚四氟乙烯PTFE 对位聚苯 Counterpoint polystyrene	≤150℃ ≤250℃	水、蒸汽、油品等 Water, steam, oil, etc.
铬镍钛钢P型 Chrome P-type nickel-titanium steel	聚四氟乙烯PTFE 对位聚苯 Counterpoint polystyrene	≤150℃ ≤200℃	硝酸类 Nitric acid
铬镍钼钛钢R型 Chrome-nickel steel R-Mo Ti	聚四氟乙烯PTFE 对位聚苯 Counterpoint polystyrene	≤150℃ ≤200℃	醋酸类 Acetic acid

主要零件材料 Main components material

阀体、阀盖 Body, bonnet	GB	WCB	ZG0Cr18Ni9	ZG0Cr17Ni12Mo2
	ASTM	WCB	CF8	CF8M
球体 Ball body	GB	2Cr13	0Cr18Ni9	0Cr17Ni12Mo2
	ASTM	420	304	316
阀杆 Stem	GB	2Cr13	0Cr18Ni9	1Cr18Ni12Mo2Ti
	ASTM	420	304	316
阀座 Seat	GB	2Cr13/PTFE	0Cr18Ni9/PTFE	0Cr17Ni12Mo2/PTFE
	ASTM	420/PTFE	304/PTFE	316/PTFE
填料 Packing	GB	PTFE	PTFE	PTFE
	ASTM	PTFE	PTFE	PTFE
螺栓 Bolt	GB	35	0Cr18Ni9	0Cr18Ni89
	ASTM	A193 B7	A320-B8	A320-B8
螺母 Nut	GB	45	0Cr18Ni9	0Cr18Ni9
	ASTM	A194 2H	A190-8	A194-8

Q47F/Y/H型固定金属密封球阀 FIXED BALL VALVE

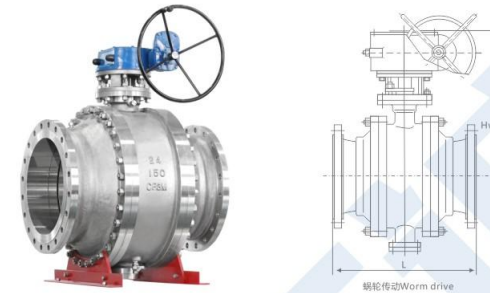


主要连接尺寸 Main connection dimensions

HG/T 20592

公称压力 PN	公称口径 DN	尺寸Size (mm)											
		L	D	K	d	Y	b	Z-do	Ws	Hs	Hw	Hd	N.m
1.6MPa	150	394	285	240	210	-	22	8-23	1000	305	470	540	300
	200	457	340	295	265	-	24	12-23	-	-	520	580	450
	250	533	405	355	320	-	26	12-25	-	-	610	640	750
	300	610	460	410	375	-	28	12-25	-	-	650	690	1250
	350	686	520	470	435	-	32	16-25	-	-	740	785	2000
	400	762	580	525	485	-	36	16-30	-	-	795	830	2350
	450	864	640	585	545	-	38	20-30	-	-	860	910	3300
	500	914	705	650	608	-	42	20-34	-	-	945	990	4300
	600	1067	840	770	718	-	46	20-41	-	-	1040	1090	7400
	700	1245	910	840	788	-	48	24-41	-	-	1150	1210	-
	800	1372	1020	950	898	-	50	24-41	-	-	1280	1340	-
	900	1524	1120	1050	998	-	52	28-41	-	-	1430	1510	-
	1000	1753	1255	1170	1110	-	54	28-48	-	-	1580	1640	-
	1200	2032	1485	1390	1325	-	56	32-54	-	-	1810	1910	-
	1400	2300	1685	1590	1525	-	60	36-54	-	-	2010	2115	-
	2.5MPa	150	403	300	250	218	-	30	8-25	1000	305	470	555
200		502	360	310	278	-	34	12-25	-	-	540	595	630
250		568	425	370	332	-	36	12-30	-	-	630	655	1050
300		648	485	430	390	-	40	16-30	-	-	650	705	1750
350		762	550	490	448	-	44	16-34	-	-	740	795	2600
400		838	610	550	505	-	48	16-34	-	-	795	830	3200
450		914	660	600	555	-	50	20-34	-	-	860	910	4600
500		991	730	660	610	-	52	20-41	-	-	945	990	6000
600		1143	840	770	718	-	56	20-41	-	-	1040	1090	10000
700		1346	955	875	815	-	60	24-48	-	-	1150	1210	-
800		1524	1070	990	930	-	64	24-48	-	-	1305	1340	-
900		1727	1180	1090	1025	-	66	28-54	-	-	1505	1600	-
1000		1880	1305	1210	1140	-	68	28-58	-	-	1615	1705	-
1200		2184	1525	1420	1350	-	72	32-58	-	-	1925	2035	-
1400	2300	1750	1640	1560	-	78	36-65	-	-	2110	2185	-	

Q47F/Y/H型固定金属密封球阀 FIXED BALL VALVE

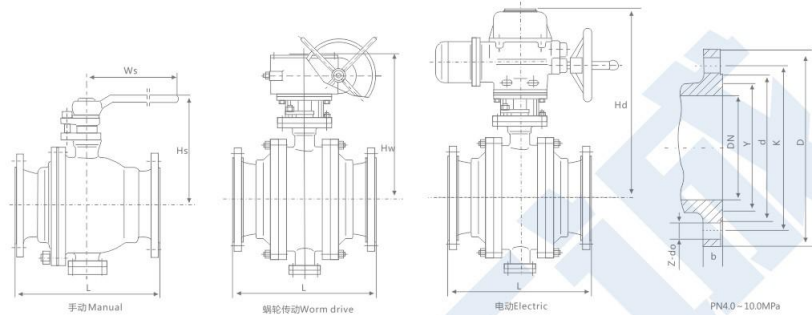


主要连接尺寸 Main connection dimensions

HG/T 20592

公称压力 PN(MPa)	公称口径 DN(mm)	尺寸Size (mm)											
		L	D	K	d	Y	b	Z-do	Ws	Hs	Hw	Hd	N.m
4.0MPa	150	403	300	250	218	204	30	8-25	1200	360	485	590	450
	200	502	375	320	282	260	38	12-30	-	-	580	640	750
	250	568	445	385	345	313	42	12-34	-	-	665	680	1250
	300	648	510	450	408	364	46	16-34	-	-	760	810	2100
	350	762	570	510	465	422	52	16-34	-	-	820	890	2800
	400	838	655	585	535	474	58	16-41	-	-	860	940	4300
	450	914	680	610	560	524	60	20-41	-	-	930	1010	5500
	500	991	755	670	612	576	62	20-48	-	-	980	1130	6800
	600	1143	890	795	730	678	62	20-54	-	-	1040	1090	11000
	700	1346	995	900	835	768	68	24-54	-	-	1150	1210	-
	800	1524	1135	1030	960	876	76	24-58	-	-	1305	1340	-
	900	1727	1270	1168	1022	-	105	32-54	-	-	1505	1600	-
	1000	1880	1238	1156	1086	-	114	32-44	-	-	1615	1705	-
	1200	2184	1467	1372	1302	-	133	32-51	-	-	1925	2035	-
6.4MPa	1400	1708	1600	1518	-	154	28-60	-	-	-	2110	2185	-
	150	495	340	280	240	204	38	8-34	1200	360	485	590	600
	200	597	405	345	300	260	44	12-34	-	-	580	650	1300
	250	673	470	400	352	313	48	12-41	-	-	665	720	2000
	300	762	530	460	412	364	54	16-41	-	-	760	840	2900
	350	826	595	525	475	422	60	16-41	-	-	820	930	3700
	400	902	670	585	525	474	66	16-48	-	-	870	990	5800
	500	1054	800	705	640	576	70	20-54	-	-	995	1150	-
	600	1232	930	820	750	678	76	20-58	-	-	1100	1180	-
	700	1397	1035	940	800	-	95	28-51	-	-	1180	1230	-
	800	1651	1149	1054	914	-	108	28-54	-	-	1345	1385	-
	900	1880	1270	1168	1022	-	114	32-54	-	-	1550	1655	-
	1000	1981	1270	1175	1092	-	133	32-51	-	-	1675	1745	-
	1200	2311	1511	1403	1308	-	152	28-60	-	-	1945	2075	-

Q47F/Y/H型固定金属密封球阀 FIXED BALL VALVE

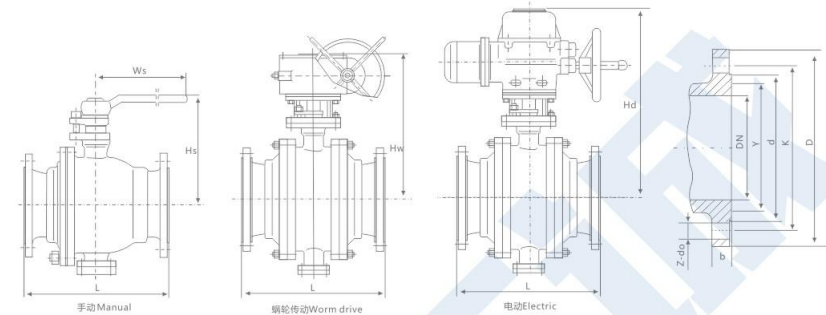


主要连接尺寸 Main connection dimensions

公称压力 PN(MPa)	公称口径 DN(mm)	尺寸Size (mm)											
		L	D	K	d	Y	b	Z-do	Ws	Hs	Hw	Hd	N.m
Class 150	2"	178	152	120.7	92	-	14.3	4-19	260	155	-	-	-
	2 1/2"	190	178	139.7	105	-	15.9	4-19	350	185	-	-	-
	3"	203	190	152.4	127	-	17.5	4-19	500	205	-	-	-
	4"	229	229	190.5	157	-	22.3	8-19	650	255	390	500	110
	5"	356	254	215.9	186	-	22.3	8-22.5	800	285	410	520	180
	6"	394	279	241.3	216	-	23.9	8-22.5	1000	305	470	540	340
	8"	457	343	298.5	270	-	27.0	8-22.5	-	-	520	580	500
	10"	533	406	362	324	-	28.6	12-25.5	-	-	610	640	830
	12"	610	483	431.8	381	-	30.2	12-25.5	-	-	650	690	1400
	14"	686	533	476.3	413	-	33.4	12-28.5	-	-	740	785	2200
	16"	762	597	539.8	470	-	35.0	16-28.5	-	-	795	830	2600
	18"	864	635	577.9	533	-	38.1	16-32	-	-	860	910	3700
	20"	914	699	635.0	584	-	41.3	20-32	-	-	945	990	4800
	24"	1067	813	749.3	692	-	46.1	20-35	-	-	1040	1090	8200
Class 300	28"	1245	927	864	800	-	71	28-35	-	-	1150	1210	12000
	32"	1372	1060	978	914	-	81	28-41	-	-	1280	1340	16000
	2"	216	165	127	92	-	20.7	8-19	260	155	-	-	-
	2 1/2"	241	190	149.2	105	-	23.9	8-22.5	350	185	-	-	-
	3"	282	210	168.3	127	-	27.0	8-22.5	500	205	-	-	-
	4"	305	254	200	157	-	30.2	8-22.5	800	270	410	530	200
	5"	381	279	235	186	-	33.4	8-22.5	1000	305	470	560	290
	6"	403	318	269.9	216	-	35.0	12-22.5	1200	340	485	590	480
	8"	502	381	330.2	270	-	39.7	12-25.5	-	-	5809	640	850
	10"	568	445	387.4	324	-	46.1	16-28.5	-	-	665	680	1400
	12"	648	521	450.8	381	-	49.3	16-32	-	-	760	810	2400
	14"	762	584	514.4	413	-	52.4	20-32	-	-	820	890	3100
	16"	838	648	571.5	470	-	55.6	20-35	-	-	860	940	4800
	18"	914	711	628.5	533	-	58.8	24-35	-	-	930	1010	6100
Class 600	20"	991	775	685.8	584	-	62.0	24-35	-	-	980	1130	7500
	2"	292	165	127	108	-	25.4	8-19	350	175	-	-	70
	2 1/2"	330	190	149.2	127	-	28.6	8-22.5	500	200	-	-	120
	3"	356	210	168.3	146	-	31.8	8-22.5	650	235	-	-	280
	4"	432	273	215.9	175	-	38.1	8-25.5	1000	275	395	550	340
	5"	508	330	266.7	210	-	44.5	8-28.5	1200	325	430	580	550
	6"	559	356	292.1	241	-	47.7	12-28.5	-	-	495	620	800
	8"	660	419	349.2	302	-	55.6	12-32	-	-	595	680	1700
	10"	787	508	431.8	356	-	63.5	16-35	-	-	680	740	2800
	12"	838	559	489.0	413	-	66.7	20-35	-	-	790	850	4200

对夹式球阀 WAFFER TYPE BALL VALVE

Q71F



主要零件材料 Main parts and materials

序号 No.	零件名称 Pneumatic flange ball valve	材料名称 Material name	材料名称 Material name	材料名称 Material name
1	阀体 Body	A351 CF8	A351 CF8M	A216 WCB
2	密封线 Gasmket	PTFE	PTFE	PTFE
3	阀盖 Bonnet	A351 CF8	A351 CF8M	A216 WCB
4	球体 Ball	SS304/SS316	SS316	SS304/SS316
5	阀座 seat	PTFE	PTFE	PTFE
6	防静电装置 Anti static device	SS304	SS316	SS304
7	阀杆 Stem	SS304/SS316	SS316	SS304/SS316
8	减磨垫 Stern Washer	PTFE	PTFE	PTFE
9	O型圈 O-Ring	NBR/VITON	NBR/VITON	NBR/VITON
10	填料 Packing	PTFE	PTFE	PTFE
11	压圈 Pressure ring	SS304	SS304	SS304
12	压板 platen	CF8	CF8	CF8
13	弹垫 spring pad	SS304	SS304	SS304
14	螺母 nut	SS304	SS304	SS304


PN16 对夹式球阀

主要外形和连接尺寸 Main external and connection dimension

SIZE	DN	L	D	D1	D2	t	C	N-φd	H	h	W	A	B	R	r	K
DN15	15	35	95	65	45	2	16	4-M12	75	8	140	42	36	3	3	9
DN20	20	38	105	75	58	2	16	4-M12	80	8	140	42	36	3	3	9
DN25	25	42	115	85	68	2	16	4-M12	90	11	170	50	42	3.5	3	11
DN32	32	53	135	100	78	2	18	4-M16	103	11	170	50	42	3.5	3	11
DN40	38	63	145	110	88	3	18	4-M16	115	15	200	70	50	4.5	3.5	14
DN50	50	72	160	125	102	3	18	4-M16	120	15	200	70	50	4.5	3.5	14
DN65	65	95	180	145	122	3	18	4-M16	140	18	300	102	70	5.5	4.5	17
DN80	76	118	195	160	138	3	20	8-M16	150	18	300	102	70	5.5	4.5	17
DN100	100	142	215	180	158	3	20	8-M16	170	18	300	102	70	5.5	4.5	17

Unit:mm

BQ41F



主要零件材料 Main parts and materials


序号 No.	零件名称 Pneumatic flange ball valve	材料名称 Material name	材料名称 Material name	材料名称 Material name
1	夹套 Jacket	25	25	25
2	阀座 valve seat	WCB	1Cr18Ni9Ti	0Cr18Ni12Mo2Ti
3	阀体 valve body	WCB	CF8(304)	CF8M(316)
4	密封圈 seal ring	聚四氟乙烯, 对位聚苯		
5	球体 sphere	2Cr13	1Cr18Ni9Ti	0Cr18Ni12Mo2Ti
6	阀杆 Stem	2Cr13	1Cr18Ni9Ti	0Cr18Ni12Mo2Ti
7	填料 filler	聚四氟乙烯, 柔性石墨		
8	填料压盖 Packing gland	WCB	CF8(304)	CF8M(316)

注：主要零部件及密封面的材质可根据实际情况条件或用户特殊要求设计选用。

公称口径 DN	主要外形尺寸和连接尺寸(mm) Main external and connection dimensions								夹套连接尺寸		配应法兰 DN(mm)
	L	D	D1	D2	b	f	Z-Φd	H	内螺纹连接	法兰连接	
15	130	95	65	45	14	2	4-Φ14	78	G3/8	15	32
20	150	105	75	55	14	2	4-Φ14	84	G3/8	15	40
25	160	115	85	65	14	2	4-Φ14	95	G1/2	15	50
32	165	135	100	78	16	2	4-Φ18	150	G1/2	15	65
40	180	145	110	85	16	3	4-Φ18	150	G1/2	15	65
50	200	160	125	100	16	3	4-Φ18	190	G1/2	15	80
65	220	180	145	120	18	3	4-Φ18	195	G1/2	20	125
80	250	195	160	135	20	3	8-Φ18	215	G1/2	20	150
100	280	215	180	155	20	3	8-Φ18	250	G1/2	20	200
125	320	245	210	185	22	3	8-Φ18	285	G1/2	20	200
150	360	280	240	210	24	3	8-Φ23	370	G1/2	20	250

不锈钢法兰三通球阀 STAINLESS STEEL FLANGE THREE-WAY BALL VALVE

Q44/644/944/45/645/945F-16C/P

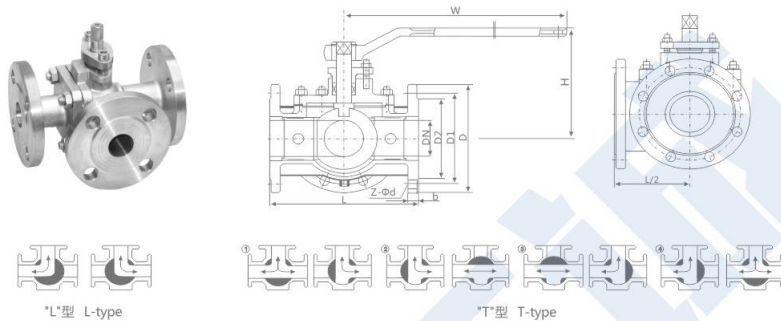

主要外形和连接尺寸 Main external and connection dimension

JB/T79.1

公称通径 DN	主要外形尺寸和连接尺寸(mm) Main external and connection dimensions								WT(kg)
	L	D	D1	D2	b	Z-Φd	H	W	
Q44F-16C Q44F-16P Q644F-16C Q644F-16P Q944F-16C Q944F-16P Q45F-16C Q45F-16P Q645F-16C Q645F-16P Q945F-16C Q945F-16P									
15	150	95	65	45	14	4-Φ14	95	140	4
20	160	105	75	55	14	4-Φ14	105	160	8
25	180	115	85	65	14	4-Φ14	113	180	7
32	200	135	100	78	16	4-Φ18	135	250	12
40	220	145	110	85	16	4-Φ18	142	300	15
50	240	160	125	100	16	4-Φ18	165	350	20
65	260	180	145	120	18	4-Φ18	175	350	25
80	280	195	160	135	20	8-Φ18	190	400	36
100	320	215	180	155	20	8-Φ18	225	500	51
125	380	245	210	185	22	8-Φ18	245	600	77
150	440	280	240	210	24	8-Φ23	265	800	108
200	550	335	295	265	26	12-Φ23	305	800	126
250	670	405	355	320	30	12-Φ25	370	1300	185

不锈钢法兰三通球阀 STAINLESS STEEL FLANGE THREE-WAY BALL VALVE

主要外形和连接尺寸 Main external and connection dimension

JB/T79.1

公称通径 DN	主要外形尺寸和连接尺寸(mm) Main external and connection dimensions								WT(kg)
	L	D	D1	D2	D6	b	Z-Φd	H	
	Q44F-40 Q45F-40P Q644F-40 Q644F-40P Q944F-40 Q944F-40P Q45F-40 Q45F-40P Q644F-40 Q644F-40P Q944F-40 Q944F-40P								
15	150	95	65	45	16	4-Φ14	95	100	4
20	160	105	75	55	16	4-Φ14	105	160	5
25	180	115	85	65	16	4-Φ14	113	160	8
32	200	135	100	78	18	4-Φ18	135	250	13
40	220	145	110	85	18	4-Φ18	142	250	19
50	240	160	125	100	20	4-Φ18	154	350	27
65	260	180	145	120	22	8-Φ18	175	350	33
80	280	195	160	135	22	8-Φ18	190	450	40
100	320	230	190	160	24	8-Φ23	225	450	53
125	380	270	220	188	28	8-Φ25	245	600	86
150	440	300	250	218	30	8-Φ25	265	800	113
200	550	360	310	278	34	12-Φ25	305	1200	133
250	670	425	370	332	36	12-Φ30	370	1400	219

主要外形和连接尺寸 Main external and connection dimension

JB/T79.2

公称通径 DN	主要外形尺寸和连接尺寸(mm) Main external and connection dimensions								WT(kg)
	L	D	D1	D2	D6	b	Z-Φd	H	
	Q44F-40 Q45F-40P Q644F-40 Q644F-40P Q944F-40 Q944F-40P Q45F-40 Q45F-40P Q644F-40 Q644F-40P Q944F-40 Q944F-40P								
15	180	95	65	45	40	16	4-Φ14	100	4
20	190	105	75	55	51	16	4-Φ14	160	5
25	200	115	85	65	58	16	4-Φ14	160	8
32	210	135	100	78	66	18	4-Φ18	250	13
40	230	145	110	85	76	18	4-Φ18	250	19
50	250	160	125	100	88	20	4-Φ18	350	27
80	310	195	160	135	121	22	8-Φ18	450	40
100	350	230	190	160	150	24	8-Φ23	450	53
125	381	270	220	188	176	28	8-Φ25	600	86
150	403	300	250	218	204	30	8-Φ25	800	113
200	502	375	320	282	260	38	12-Φ30	1200	133
250	568	445	385	345	313	42	12-Φ34	1400	219